

PE 118 CONBIN BOARD JUMPER SETTINGS

A series of switches (called "jumpers") are mounted on the CONBIN board which enable you to change various characteristics of the hardware. Please refer to the illustration for the location of these switches and their names.

To change the setting of a jumper, grasp the small plastic block and pull it up vertically. Refer to the illustration and then replace the block in the new setting. Gently push down until the block is in position.

WARNING

DO NOT TOUCH THE PIN CONNECTORS OF THE SWITCHES. IF YOU BEND OR BREAK THEM IT IS IMPOSSIBLE TO CHOOSE THE DAMAGED SETTING AGAIN.

LIST OF JUMPERS

There are 6 groups of jumpers mounted on the board. Use the illustration to find them. They are listed below:

DISCOM

Used to Enable or disable the COM connector. Two positions are possible: enable and disable. The factory setting is ENABLE.

MSC

Used to set the automatic eject of a card, if a card is in the card reader machine when the machine is switched on. Two positions are possible; automatic eject and no automatic eject. The factory setting is AUTOMATIC EJECT.

ADCOM U-LINK

Used to set the I/O address of the COM controller. The address shown in the illustration is "3E8" in hex and is the factory setting.

ADNEC U-LINK

Used to set the I/O address of the 78C10 multicontroller unit. The address shown in the illustration is "320" in hex and is the factory setting.

ITCOM U-LINK

Used to set I/O interrupt line of the COM controller. Two lines are available numbered 4 and 3, plus one setting for switching off the I/O interrupt line which is marked "NO" in the illustration, and is the factory setting.

ITNEC U-LINK

Used to set the I/O interrupt line of the 78C10 multicontroller. Five lines are available numbered 3, 4, 5, 7, and 9, plus one setting for switching off the I/O interrupt line which is marked "NO" in the illustration and is the factory setting.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.

Propriété de
S A PHILIPS INDUSTRIELLE ET COMMERCIALE
Capital de 143 500 000 francs
50, avenue Montaigne, 75380 PARIS
R C S PARIS B 622 051 738


Tous droits strictement réservés.
Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.

PHILIPS

See

Centre de Technologies Informatiques - Fontenay-aux-Roses - France

Philips

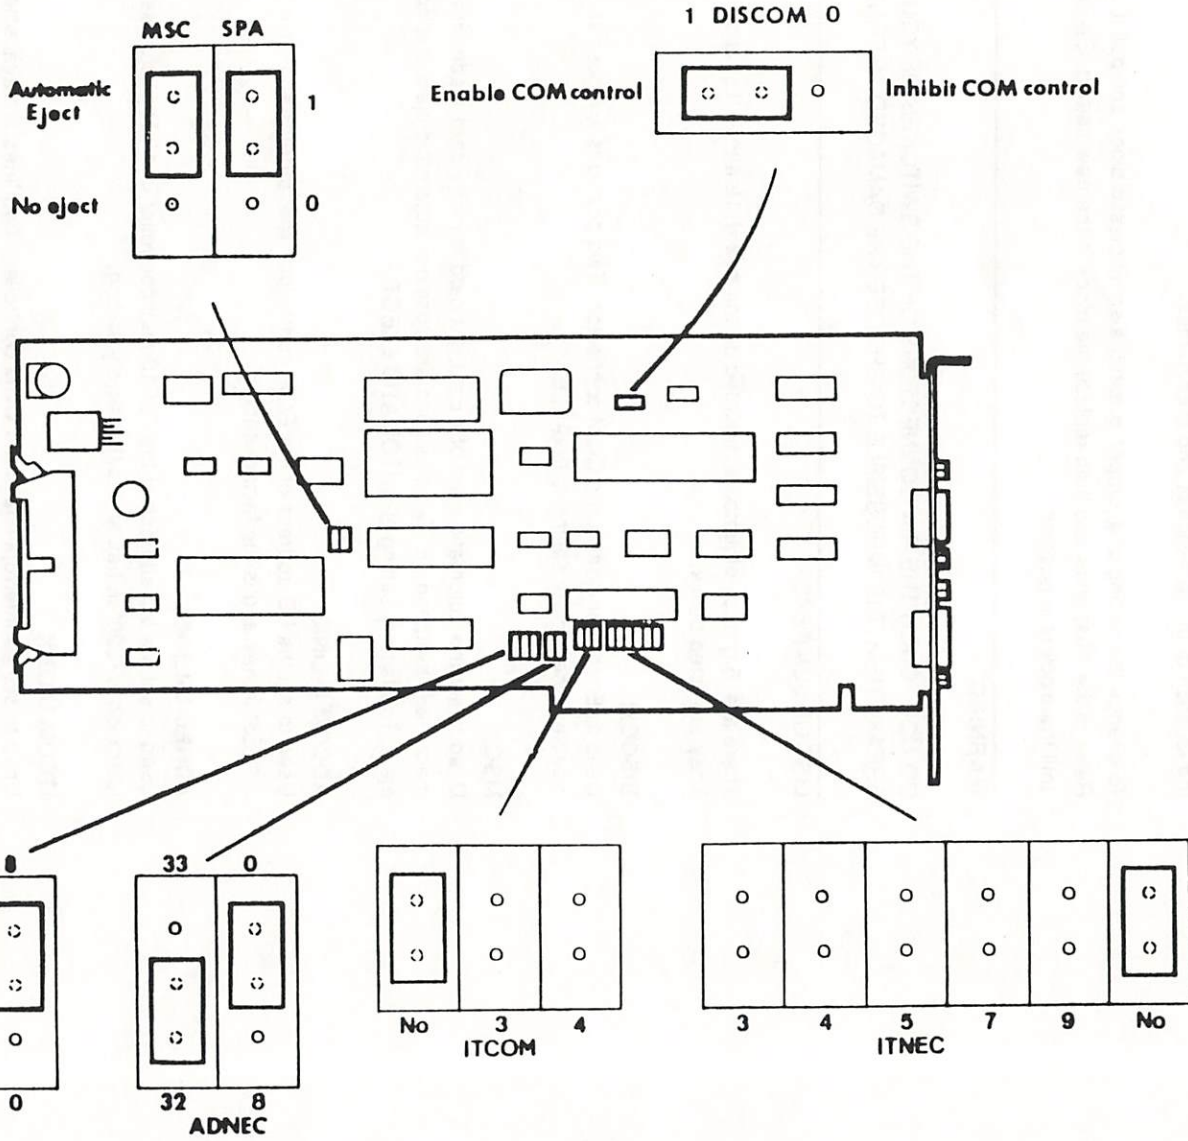

INSTALLATION NOTICE FOR PE 118

5111 991 15131

Date : 900830
Page : 2/2

5111 991 00447