

306


# GRETAG

## TA-803

### TELETYPE ADAPTER

The TA-803 teletypewriter adapter is used to connect the cryptographic unit to commercially available 5-level-code (CCITT No. 2) teletypewriters.

A built-in automatic line-end control breaks down a continuous text into telex lines of 69 characters. The TA-803 is built into a metal case with cover.

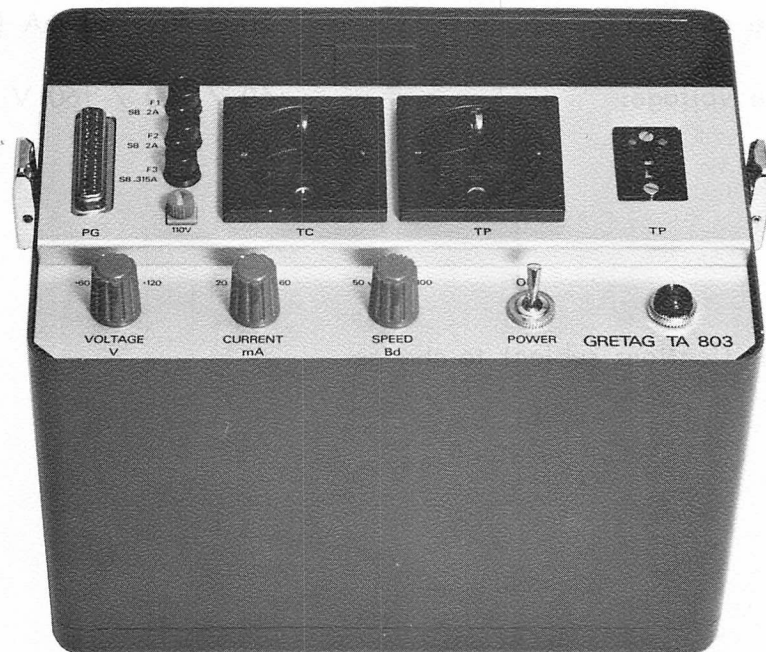

Specifications:

Overall dimensions:	22 cm (8.7") long 15 cm (6") wide 18 cm (7") high
Weight:	approx. 4 kg (9 lbs)
Temperature range:	operating 0° to +50° C storage -30° to +70° C
Power:	110/220 V AC ±15 %, 60 VA 50/60 cps ±10 %
Length of power cord:	1.8 m (5.9 ft)
Length of interconnecting cable:	1 m (3.3 ft)
Radiation:	active and passive filtering to eliminate radiation of plain text information
Teletypewriter code:	CCITT No. 2
Telegraph speed:	50 / 75 / 100 Baud (switchable)
Line current:	20 / 40 / 60 mA (switchable)
Line voltage:	60 / 120 / ±60 V (switchable)

Specifications subject to change

980306 P 7102 E

**GRETAG**

GRETAG LIMITED, ALTHARDSTRASSE 70, CH-8105 REGENSDORF/ZURICH, SWITZERLAND, TELEPHONE: 051 711771, TELEX: 53950

Printed in Switzerland