


305

<b>GRETAG</b>
<b>TP-803</b>
<b>TAPE PERFORATOR</b>

The TP-803 punched tape perforator is used to punch 5-level CCITT Code No. 2 punched tapes.

A built-in automatic line-end control breaks down a continuous text into telex lines of 69 characters.

The TP-803 is built into a metal case with cover.

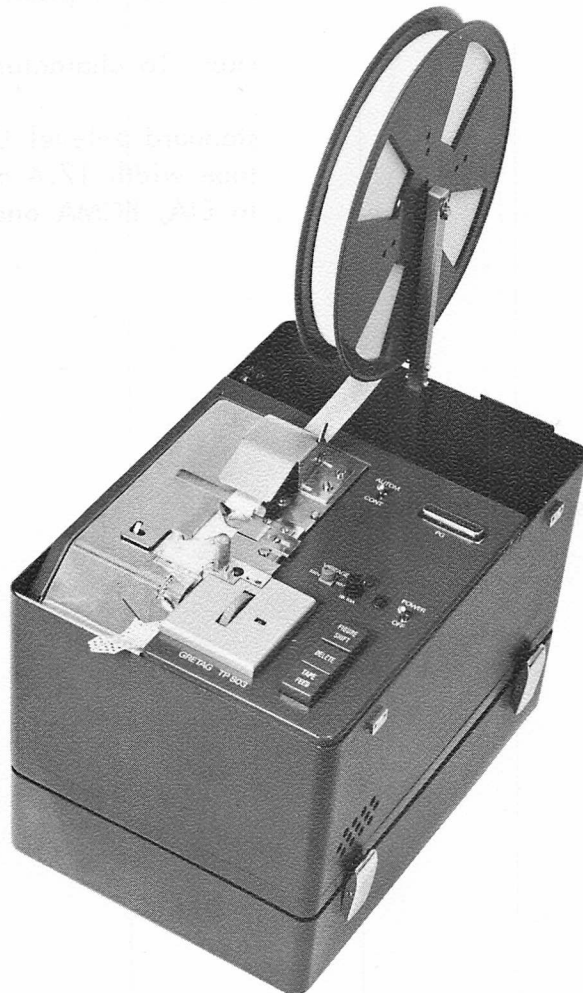

GRETAG

Specifications:

Overall dimensions:	24 cm (9.5") long 30 cm (11.8") wide 23 cm (9") high
Weight:	approx. 10 kg (22 lbs)
Temperature range:	operating 0° to +50° C storage -30° to +70° C
Power:	110/220 V AC $\pm 15$ %, 50 VA (selector) 50/60 cps $\pm 10$ %
Length of power cord:	approx. 1.8 m (5.9 ft)
Length of interconnecting cable:	approx. 80 cm (2.6 ft)
Radiation:	active and passive filtering to eliminate radiation of plain text information
Speed:	max. 16 characters/sec.
Paper tape:	standard 5-level CCITT Code No. 2 tape width 17.4 mm (11/16") according to EIA, ECMA and DIN 66016 standards.

Specifications subject to change.

980305 P 7102 E

**GRETAG**

GRETAG LIMITED, ALTHARDSTRASSE 70, CH-8105 REGENSDORF/ZURICH, SWITZERLAND, TELEPHONE: 051 711771, TELEX: 53950

Printed in Switzerland