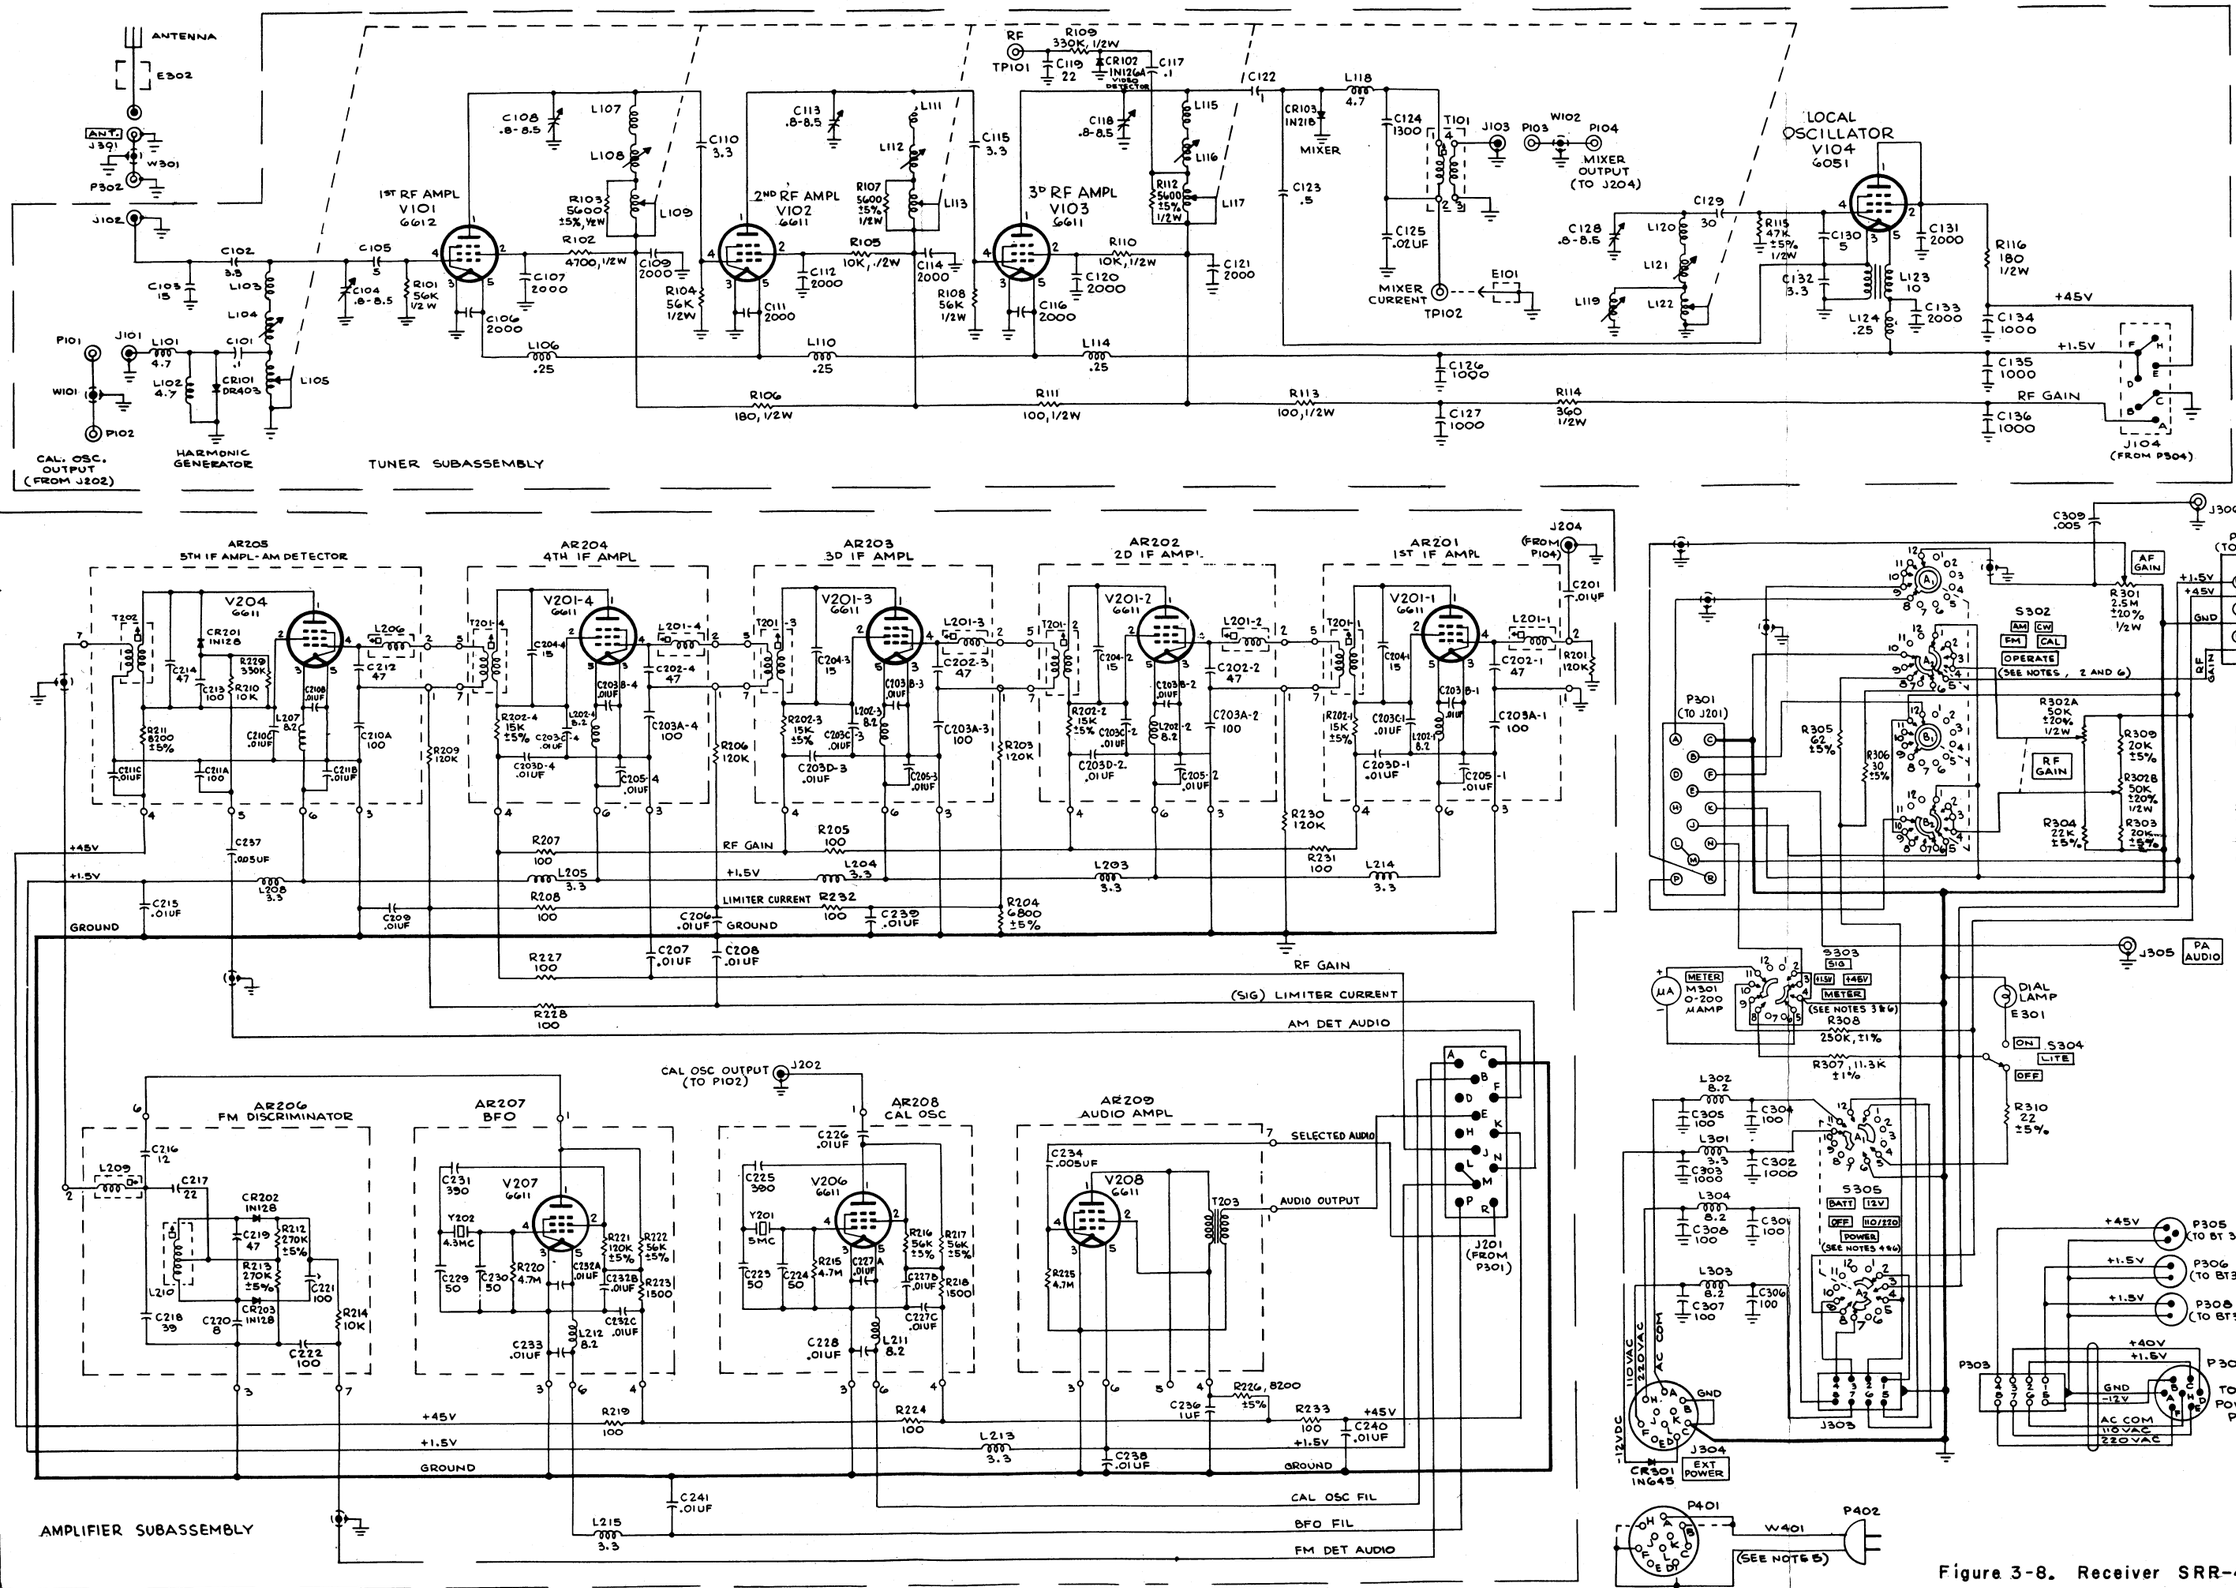

NOTES:

1. UNLESS OTHERWISE SHOWN:
   ALL CAPACITORS ARE IN UUF.
   ALL INDUCTORS ARE IN UH.
   ALL RESISTORS ARE IN OHMS ±10%, 1/2W
   (K=1,000 OHMS M=1,000,000 OHMS).
2. SWITCH S302 IS SHOWN IN FM POSITION.
3. SWITCH S303 IS SHOWN IN SIG POSITION.
4. SWITCH S305 IS SHOWN IN OFF POSITION.
5. CONNECTIONS TO P401 ARE MADE AS FOLLOWS;
   110VAC - PINS "A" AND "F"
   220VAC - PINS "A" AND "H"
   -12VDC - PINS "B" AND "D"
6. SWITCHES S302, S303 AND S305 ARE VIEWED FROM FRONT PANEL "A" AND "B" REFER TO FRONT SECTION OF WAFERS.
   "A" AND "B" REFER TO MIRROR VIEW OF REAR SECTION OF WAFERS.

Figure 3-8. Receiver SRR-4, Schematic Diagram.